




Flat Lifting Socket



Model	Size	Load group (KG)	Dimensions(mm)			
			D	A	B	H
WWFS-A1	Rd12	500	16	25	35	30
WWFS-A2	Rd16	1200	21	35	50	35
WWFS-A3	Rd20	2000	27	60	60	47
WWFS-A4	Rd24	2500	31	60	80	54
WWFS-A5	Rd30	4000	40	80	100	72
WWFS-A6	Rd36	6300	48	100	130	84
WWFS-A7	Rd42	8000	54	130	130	98
WWFS-A8	Rd52	12500	68	130	150	117
Other size on request						

The Flat Lifting Socket steel bars in the precast components can also serve as additional reinforcement. The height of these sockets allows them to be placed in the shallow dimension of slab and terrace units.

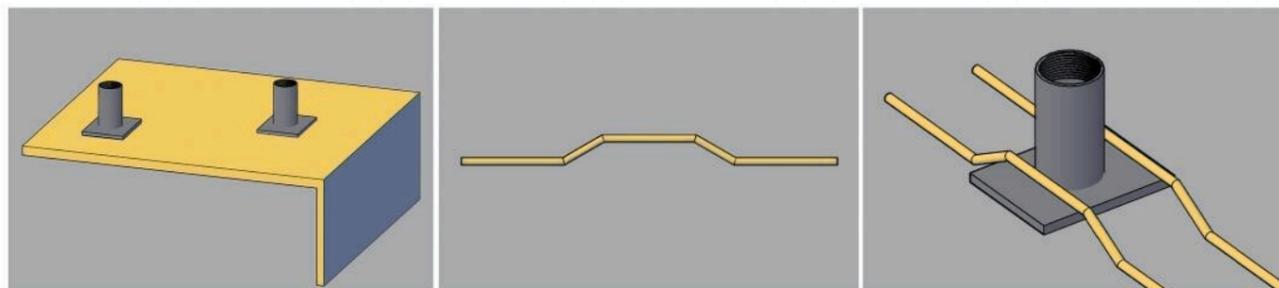

DESCRIPTION :

The flat lifting socket steel bars in precast components can also serve as additional reinforcement, and their height allows installation in the shallow dimensions of slab and terrace units.