



## Spread Anchor

The Spread Anchor is designed with an extended foot that industrial scale solution for high-capacity repeated handling. This versatile anchor can be used on the front, back or edge of a panel for back stripping and rotation from horizontal to vertical.

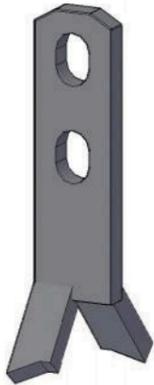

Model	Load group	Axial load	Dimensions(mm)			
	Tons	Tons	L	W	T	D
WWLS-D1	2.5	1.4	110	30	6	14
WWLS-D2			160			
WWLS-D3		2	130			
WWLS-D4			160			
WWLS-D5		210				
WWLS-D6		2.5	150			
WWLS-D7			200			
WWLS-D8		250				
WWLS-D9	5	3	160	40	10	18
WWLS-D10			200			
WWLS-D11			280			
WWLS-D12		4	180			
WWLS-D13			240			
WWLS-D14		320				
WWLS-D15		5	180			
WWLS-D16			240			
WWLS-D17		400	26			
WWLS-D18		10	5.3		220	
WWLS-D19	260					
WWLS-D20	340					
WWLS-D21	7.5		260			
WWLS-D22			300			
WWLS-D23	420					
WWLS-D24	10		300			
WWLS-D25			370			
WWLS-D26	520	35				
WWLS-D27	26	14	370	80	20	35
WWLS-D28			460			
WWLS-D29		22	500			
WWLS-D30			620			

Other size on request

## DESCRIPTION :

The Spread Anchor is designed with an extended foot that industrial scale solution for high-capacity repeated handling. This versatile anchor can be used on the front, back or edge of a panel for back stripping and rotation from horizontal to vertical.